



Sun Control Window Films


Performance Results:

| | |
|----------------------------------|-----|
| Visible Light Transmitted | 33% |
| Total Solar Energy Rejected | 61% |
| UV Light Rejected | 99% |
| Glare Reduction | 63% |
| Visible Light Reflected Interior | 19% |
| Visible Light Reflected Exterior | 29% |



Affinity 30

*Enhancing light
as only 3M can*

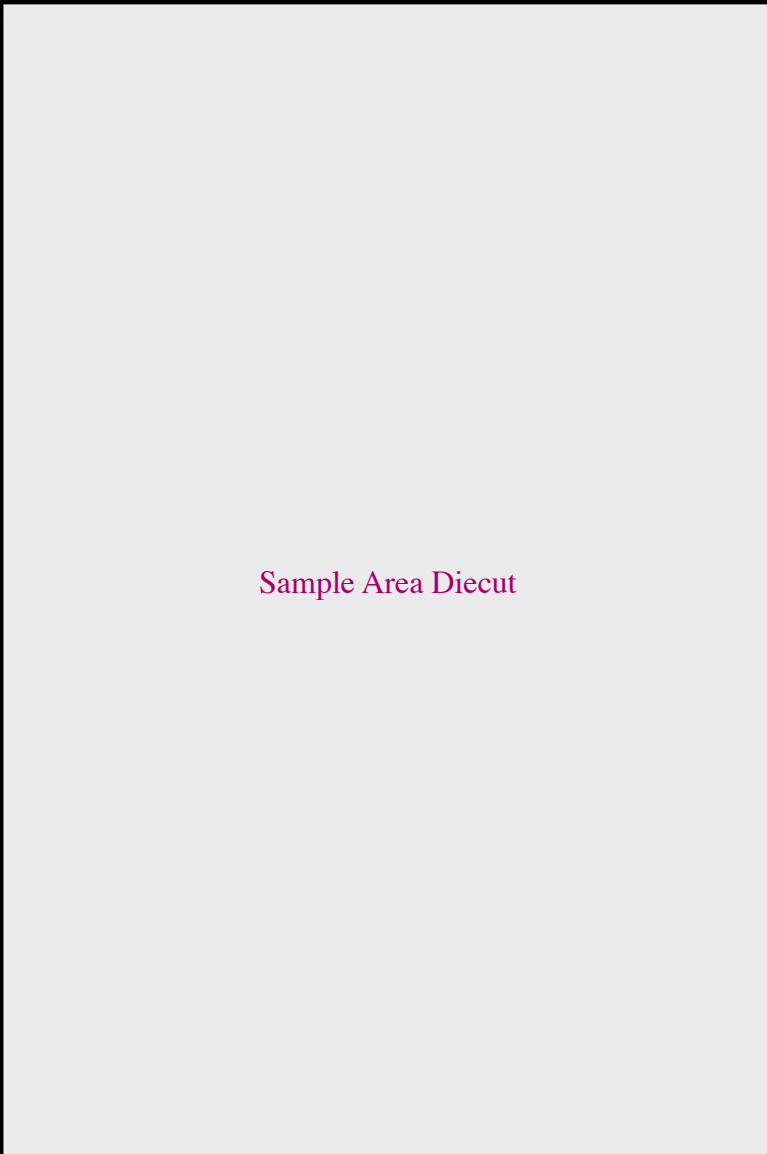

Sample Area Diecut

Affinity 30 Benefits:

- High heat rejection provides energy savings and improved comfort
- Reduces fading and helps to protect furnishings
- Lower interior and exterior reflectivity
- Reduces glare and eye discomfort
- Comprehensive 3M manufacturer's warranty
- Increases personal safety from flying glass

| Glass Type (All 1/4") | Single Pane Clear | Single Pane Tinted | Double Pane Clear | Double Pane Tinted |
|------------------------------|-------------------------|--------------------------|-------------------------|--------------------------|
| Visible Light Transmitted | 33% | 20% | 30% | 18% |
| Total Solar Energy Rejected | 61% | 63% | 54% | 64% |
| UV Light Rejected | 99% | 99% | 99% | 99% |
| Glare Reduction | 63% | 62% | 62% | 62% |
| Visible Light Reflected Int. | 19% | 19% | 20% | 20% |
| Visible Light Reflected Ext. | 29% | 14% | 32% | 15% |
| Shading Coefficient | 0.45 | 0.42 | 0.53 | 0.41 |
| Emissivity | 0.67 | 0.67 | 0.67 | 0.67 |
| U Value | 0.94 | 0.94 | 0.45 | 0.45 |
| Solar Heat Reduction | 52% | 42% | 35% | 31% |

3M Building Safety Solutions Department
 3M Center, Building 223-2S-24
 St. Paul, MN 55144-1000
 Printed in U.S.A. © 3M 2006 70-0709-0166-8